


# Vibration Transducer SLD121B / SLD121F

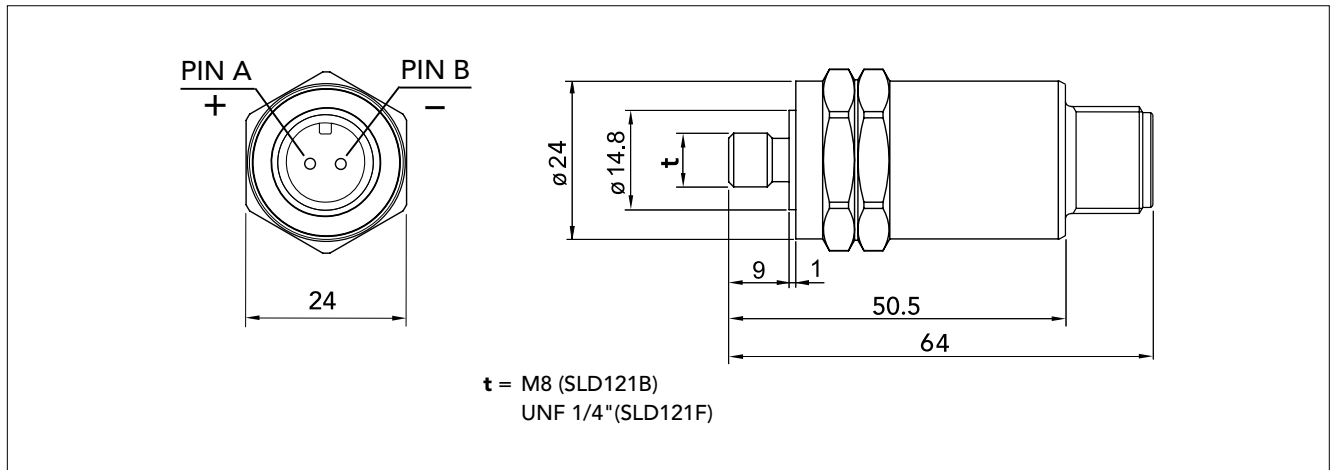

The vibration transducer SLD121 B and SLD121F are piezo-electric accelerometers of compression type with built-in preamplifier, designed for vibration monitoring of industrial machinery. The electrical signal is isolated from the transducer housing.

The transducer is mounted against a smooth, flat surface on the machine. SLD121B has thread size M8 and SLD121F has thread size UNF 1/4". The transducer is connected via a twisted pair cable with 2 pin connector, compatible with 2 pin MIL-C-5015 style.

## Technical data

Nominal sensitivity, main axis: 1.2 mV/m/s<sup>2</sup> \* =12 mV/g

Transverse sensitivity: max. 10%

Typical base strain sensitivity: 0.01 m/s<sup>2</sup>/μ strain

Linear frequency range: 2 to 1000 Hz (±1 dB)

Max. peak acceleration: 600 m/s<sup>2</sup> = 60 g

Settling time: 3 sec

Bias point: 6 to 9 V (typical 8 V)

Temperature range: -40° C to +125° C  
(-40° F to 260° F)

Power requirements: 12 to 24 V / 2 to 5 mA

Casing: Stainless acid proof steel

Sealing: IP 67 together with appropriate connector

Isolation: Case isolated, > 1 Mohm

Torque limit: 10 Nm (7.4 lbf · ft)

Weight: 110 grams (4 oz)

Connector type: Compatible with 2 pin MIL-C-5015 style

\* Individual value given on the calibration chart.

## Mounting tools

81027 Holder for counterbore

81030 Pilot for UNF 1/4" (SLD121F)

81031 Pilot for M8 (SLD121B)

81057 Counterbore, diameter 20 mm

To drill the mounting hole, use drill bit 6.9 mm (5.5 for UNF 1/4"). Torque the transducer with a 24 mm torque wrench.

